



BARNDOMINIUM · SHOP + APARTMENT

APACHE

Drive-in shop below · full apartment above

Panelized barndominium shell · 1 Bed · 1 Bath · 2,170 total sqft on a 40' × 26' footprint

THIS PRESENTATION

Apache · Barndominium

1,140 sqft shop · 1,030 sqft apartment · 40' × 26'

Shell kit from **\$108,475**


*Panelized shell only. Engineering & shipping additional.
Discounts available on multiple units.*

9 approved states UT · ID · CO · WY · MT · AZ · NV · OR · WA

LOWER LEVEL · DRIVE-IN SHOP

APACHE

Lower Level · 1,140 sqft drive-in shop · 40' × 26' footprint · Two 10' × 10' overhead doors

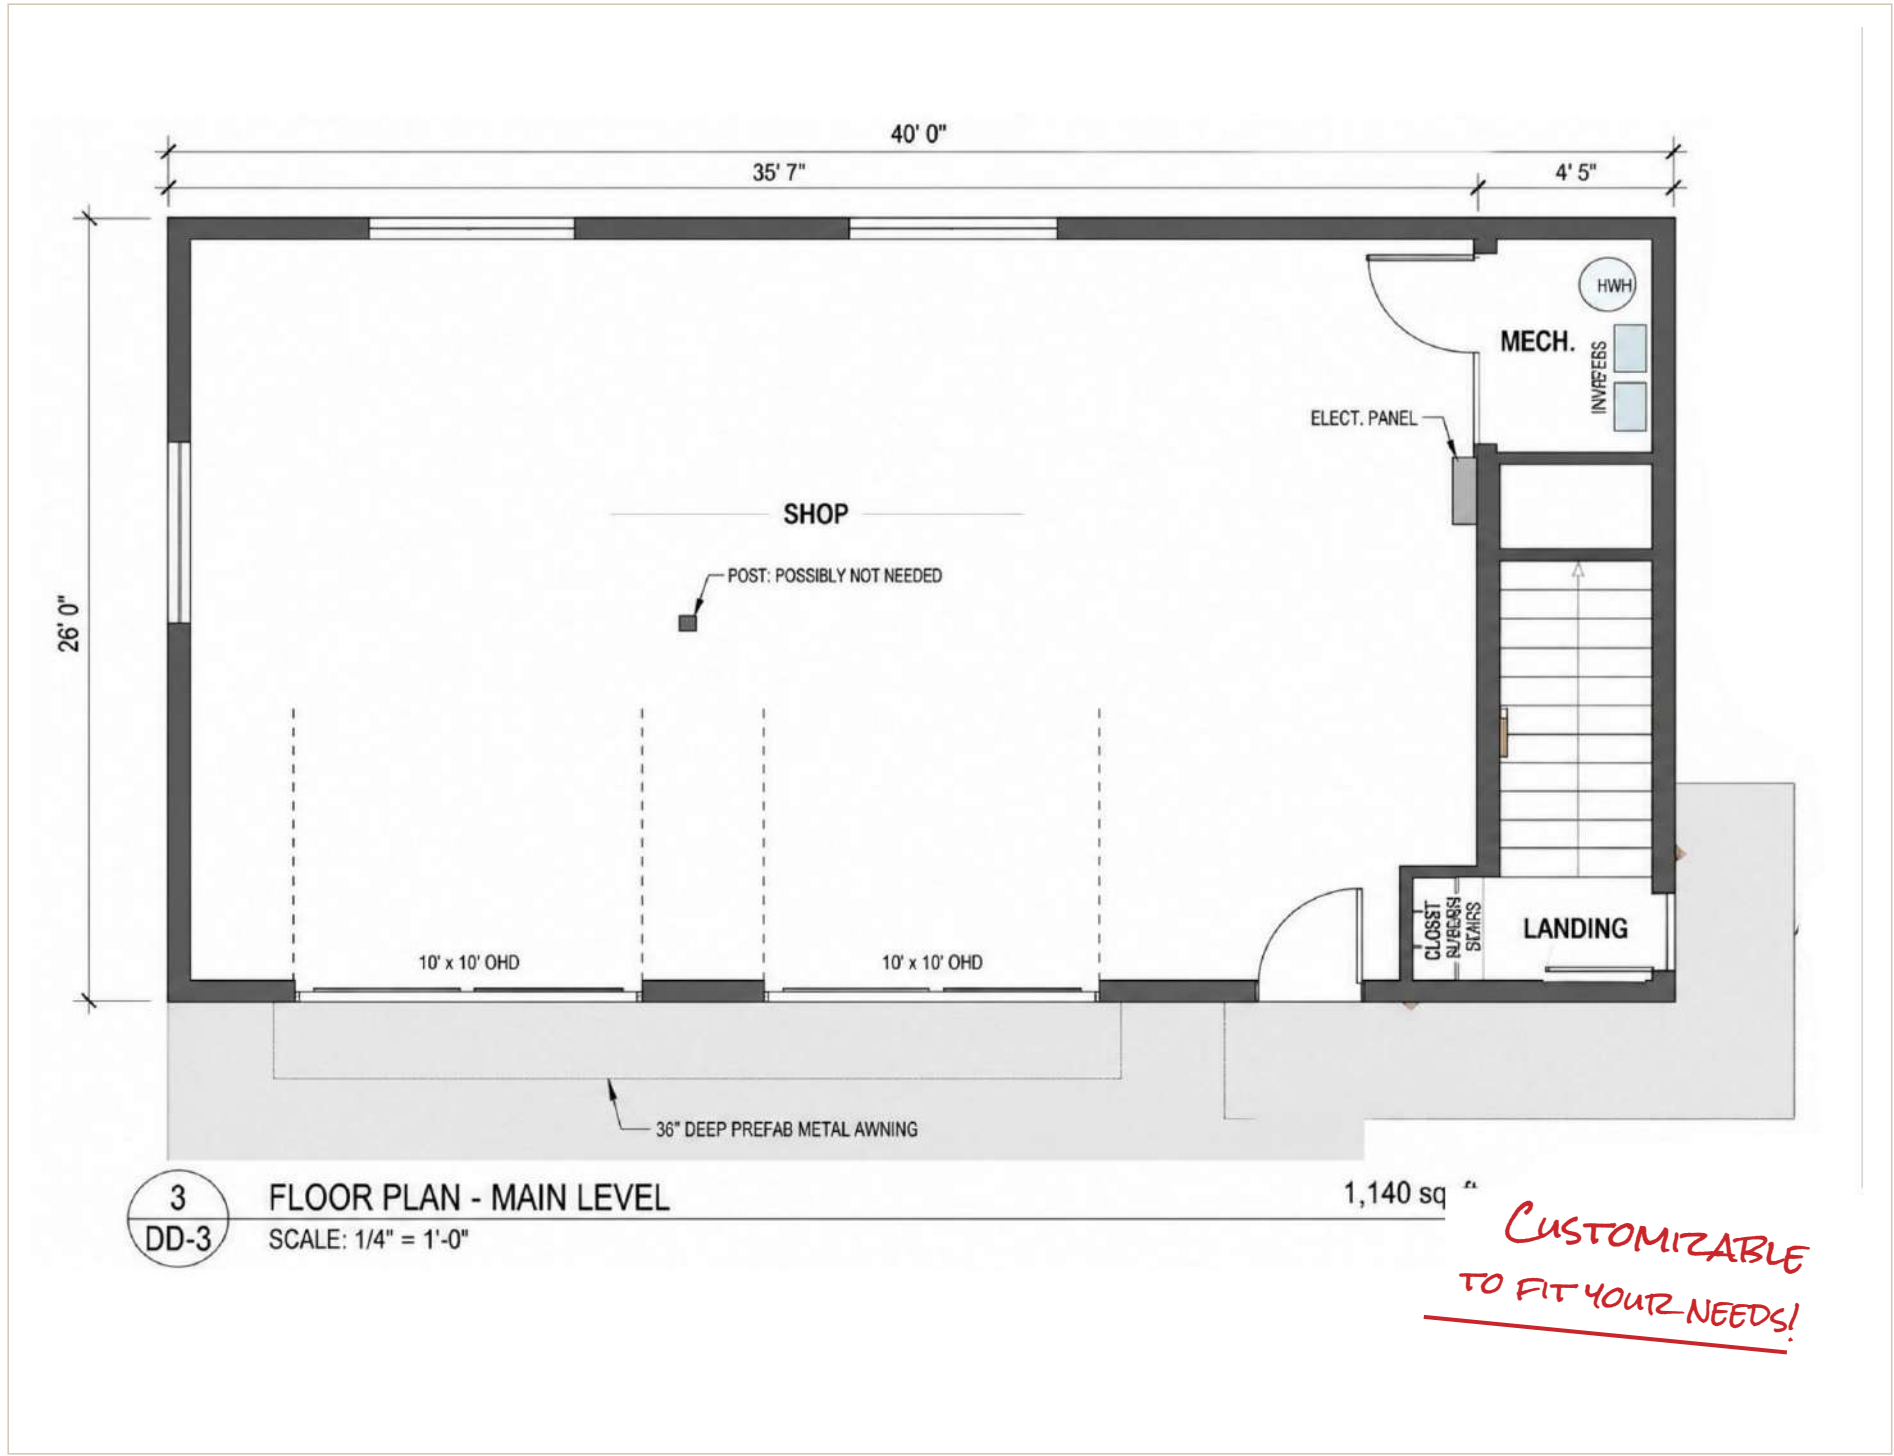

SHELL KIT FROM

\$108,475

Panelized shell only. Engineering & shipping additional.

FEATURES & SPECS

- Clear-span 40' × 26' shop floor — no interior posts required
- Two 10' × 10' overhead doors for drive-in access
- Mechanical room with hot-water heater and inverter location
- Electrical panel and stair landing along the rear wall
- Interior stairs to upper apartment with under-stair closet
- Built-in covered entry — 42" prefab metal awning wraps the corner
- 36" deep prefab metal awning across the shop face
- Single rear walk door beside the stair landing

BEST FOR

WORKSHOP HOME

AUTO ENTHUSIAST

MAKER / HOBBYIST


BOAT / RV STORAGE

TRADESPERSON

UPPER LEVEL · APARTMENT + STUDIO

APACHE

Upper Level · 1,030 sqft apartment · 1 Bed · 1 Bath · Kitchen + Art Studio + Living

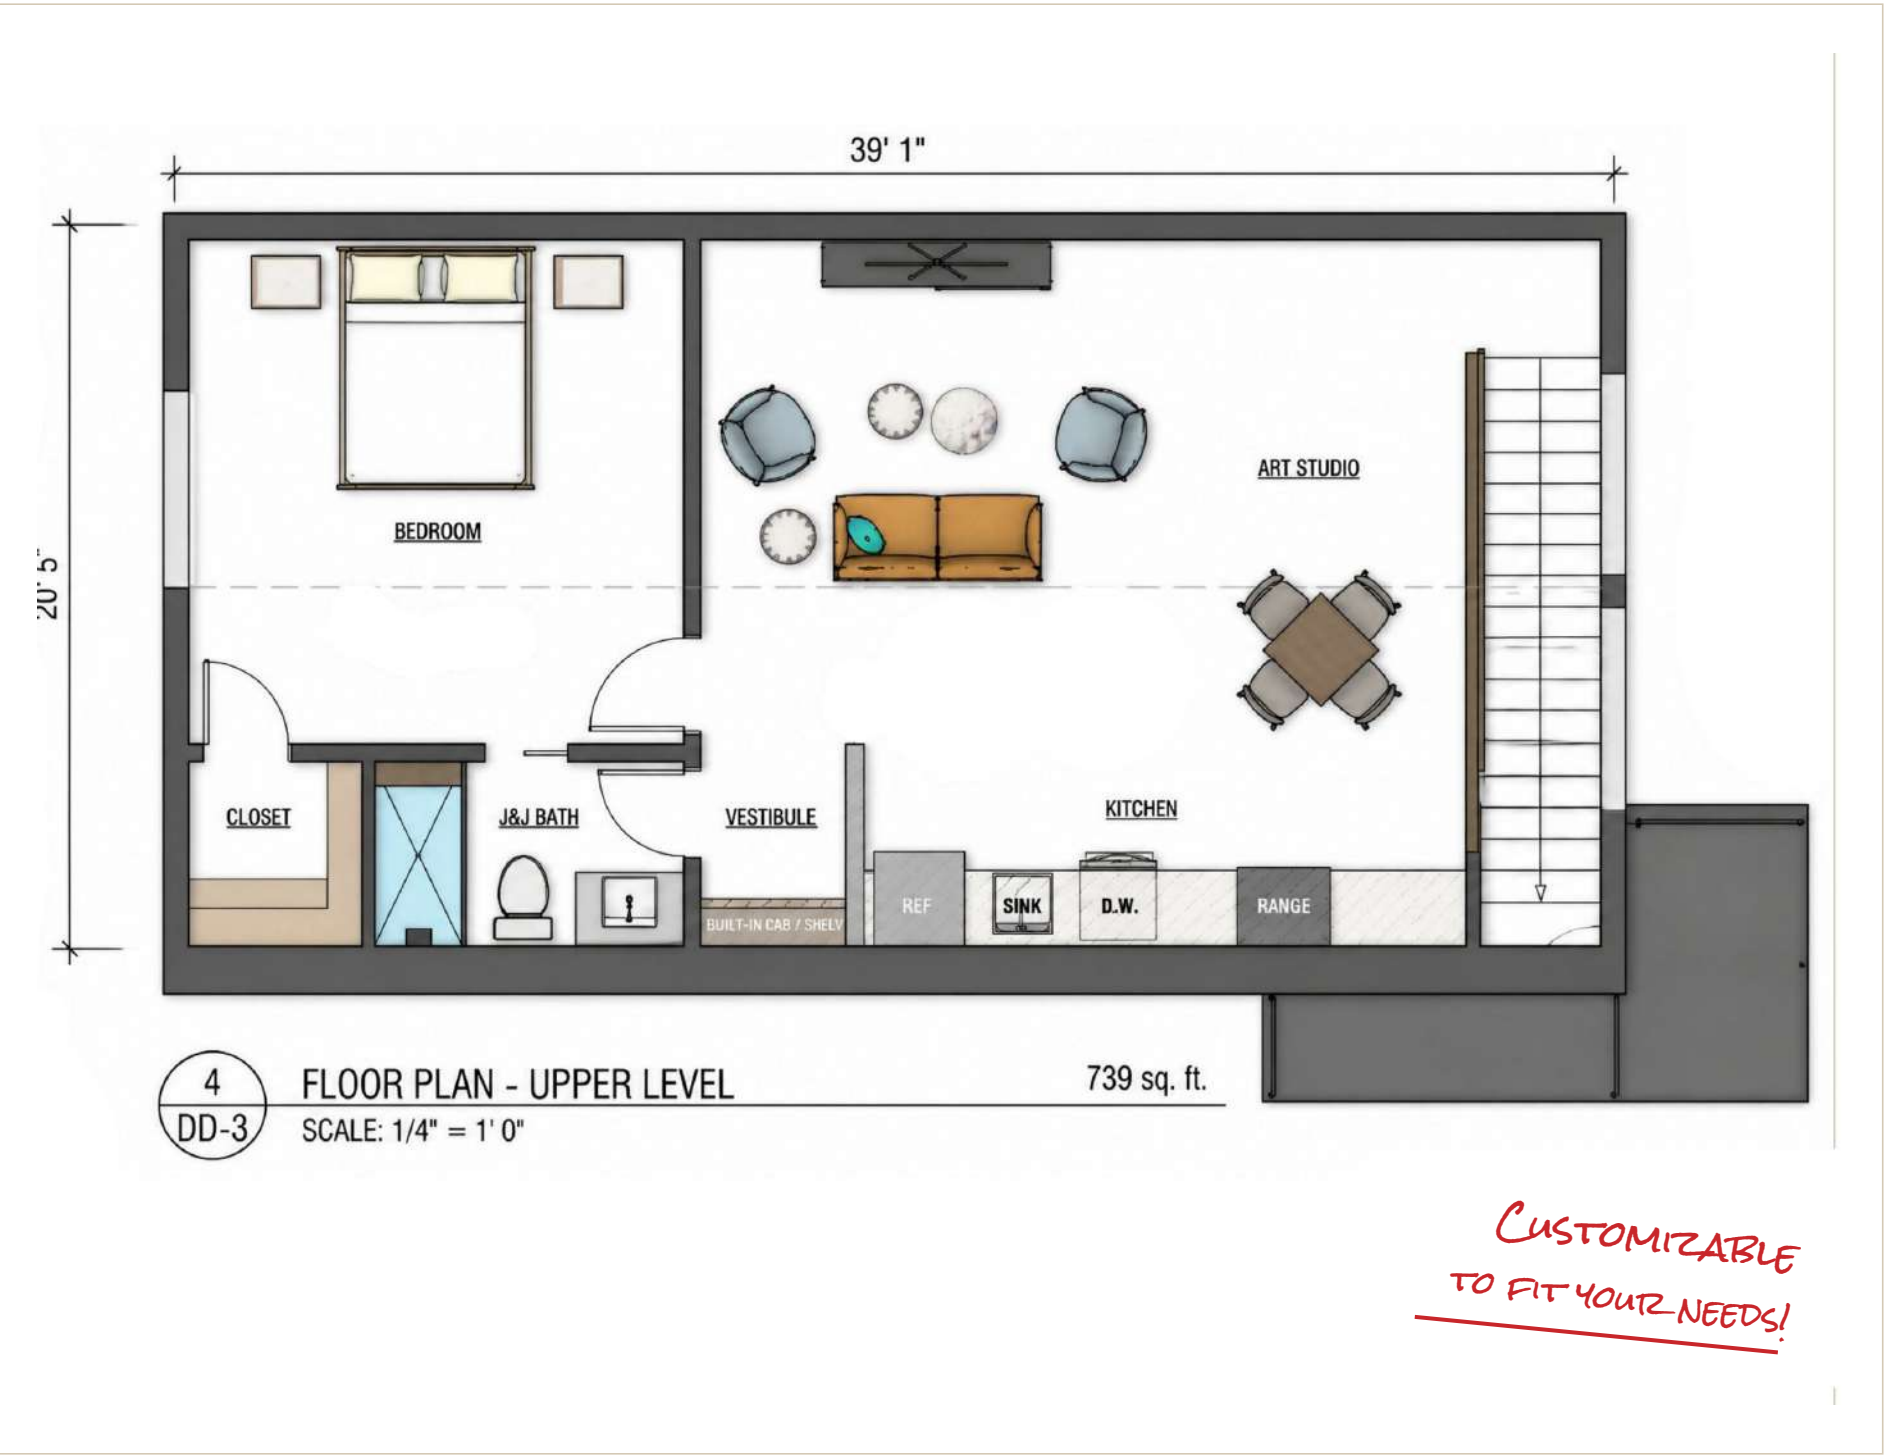

FEATURES & SPECS

- Open-concept layout — Living, Art Studio, and Kitchen flow together
- Bedroom with exposed ridge beam above and large closet
- Jack-and-Jill bath with vestibule serving the bedroom and main living area
- Full kitchen — refrigerator, sink, dishwasher, and range
- Generous art studio / dining area with room for a table
- Built-in cabinet and shelving across from the bath
- 39' 1" x 20' 5" upper footprint over the shop
- Stair arrival at the kitchen end of the apartment

BEST FOR

- LIVE-IN STUDIO
- GUEST HOUSE
- ADU / SECONDARY UNIT
- WORK-FROM-HOME
- WORKFORCE HOUSING

WHAT ARRIVES ON SITE

The Apache Shell, Delivered

Panelized walls · trusses · ZIP System sheathing · roof dry-in



Apache shell — dry-in stage, before owner-scope finishes.

WHAT THE SHELL KIT INCLUDES

- Pre-framed wall panels with ZIP System sheathing
- Engineered trusses sized for your snow load
- Roof dry-in (sheathing + weather protection)
- Standard entry doors
- Window packages — Vinyl, Amsco, or Andersen 100
- Shipping, handling, and install in delivered scope

OWNER SCOPE — CONTRACTED SEPARATELY

- Foundation and site work
- Interior finishes, cabinetry, and flooring
- Exterior siding stain, roof color, and paint
- Mechanical, electrical, and plumbing
- Interior doors, trim, and final hardware

Live-work barn-style shell. Finish decisions stay with you; we deliver the panelized system.

DARK METAL + WARM CEDAR SCHEME

Perspectives & Elevations

Modern barn aesthetic · vertical metal cladding · warm cedar accent · standing-seam gable



FRONT CORNER



REAR CORNER



ENTRY



SIDE

EXTERIOR DETAILS

- Vertical dark metal siding on main volume
- Warm cedar wood accent on upper-level face
- Standing-seam gable roof — classic barn profile
- Two 10' × 10' overhead doors on shop face
- Covered metal awning over shop entry and side door
- Tall upper-level windows for daylight
- Black entry door with sconce lighting
- Built for modern barn aesthetics — live in, not just store

A NOTE ON FINISHES

These renderings show one finish direction. Siding stain, roof color, and paint are owner-selected and contracted separately.

See page 4 for what the kit delivers.



READY TO BUILD? · sales@zipkithomes.com · 435-340-1171